

NOTE:  
SOIL STOCKPILES SHALL HAVE SILT FENCE OR BERMS CONSTRUCTED AT THE BASE AND SHALL NOT BE LEFT UNCOVERED MORE THAN FOURTEEN DAYS. SOIL STOCKPILES REMAINING ON THE SITE MORE THAN FOURTEEN DAYS SHALL BE COVERED WITH PLASTIC TARP SECURELY ANCHORED WITH ROPES TIED TO STAKE OR HEAVY BLOCKS. SOIL MATERIAL NOT INTENDED FOR REUSE ON THE SITE SHALL BE REMOVED FROM THE SITE AS SOON AS POSSIBLE.

- ### NOTES
- SITE WORK SHALL FOLLOW THE RECOMMENDATIONS OF THIS EROSION AND SEDIMENT CONTROL PLAN (ESC), THE STORMWATER POLLUTION PREVENTION PLAN (SWPPP) BINDER NOTEBOOK, THE STATE OF IDAHO DEQ CATALOG OF STORMWATER BEST MANAGEMENT PRACTICES AND BOISE COUNTY REQUIREMENTS.
  - A COPY OF THIS EROSION CONTROL PLAN AND THE SWPPP BINDER NOTEBOOK SHALL BE KEPT AT THE SITE DURING CONSTRUCTION OR SHALL HAVE THE LOCATION OF THE EROSION AND SEDIMENT CONTROL PLAN AND SWPPP INCLUDED IN THE PROJECT INFORMATION SIGN POSTED AT THE SITE.
  - EARTHWORK CONSTRUCTION SHOULD BE SCHEDULED DURING DRY WEATHER TO REDUCE EROSION AND SEDIMENT POTENTIAL.
  - STRIP ONLY AREAS THAT REQUIRE REMOVAL OF EXISTING VEGETATION, WHERE POSSIBLE LEAVE A VEGETATION BUFFER STRIP AROUND THE SITE CONSTRUCTION AREA.
  - ANY HAZARDOUS WASTE MATERIAL ENCOUNTERED SHOULD BE PROPERLY DISPOSED SEPARATELY FROM GENERAL SITE DEBRIS.
  - DURING DEMOLITION, STRIPPING AND CONSTRUCTION THE AREA SURROUNDING THE SITE SHOULD BE KEPT CLEAN. TRANSPORT OF MUD, SEDIMENT OR OTHER DEBRIS SHOULD BE MINIMIZED.
  - CONSTRUCTION TRAFFIC SHALL BE LIMITED TO USING A DESIGNATED CONSTRUCTION ENTRANCE. PRECAUTIONS SHALL BE TAKEN TO PREVENT TRACKING OF DIRT, MUD AND DUST FROM THE SITE.
  - THE SITE AND SURROUNDING AREA SHOULD BE INSPECTED TWICE DAILY AND CLEANED UP AS NEEDED.
  - EXPOSED SOILS SHOULD BE LIGHTLY WATERED DURING DRY WEATHER OR OTHERWISE TREATED TO PREVENT DUST TRANSPORT FROM THE SITE.
  - CONTRACTOR SHALL KEEP RECORDS OF INSPECTION AND MAINTENANCE OF EROSION AND SEDIMENT CONTROL MEASURES.
  - PLANT OR HYDROSEED BARE SOIL THAT HAS BEEN EXPOSED OR CREATED BY EARTHWORK CUT AND FILL. SEED BARE SOIL WITH NATIVE GRASSES BY HYDROSEEDING OR INSTALLING PRE-SEED COIR FIBER OR JUTE FIBER MATS TO PREVENT EROSION DURING NON GROWING SEASON OR HEAVY RAINFALL SEASONS.

### OWNER CERTIFICATION

I certify under penalty of law that this documents and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those person directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information including the possibility of fine and imprisonment for knowing violations.

NAME \_\_\_\_\_  
 TITLE \_\_\_\_\_  
 DATE \_\_\_\_\_

**NATURE'S VIEW ESTATES**  
**SUBDIVISION**  
 Boise County, Idaho

**Focus Engineering**  
 Civil-Geotechnical-Environmental-Structural  
 3835 West Scenic Drive, Boise, Idaho 83703  
 (208) 395-1979 (208) 395-2399 fax focus@cablcon.net

| REVISIONS: |  |
|------------|--|
| 1          |  |
| 2          |  |
| 3          |  |
| 4          |  |
| 5          |  |
| 6          |  |
| 7          |  |



PRELIMINARY  
 DRAWING  
 NOT FOR CONSTRUCTION



- NOTES:
- UNRESTRICTED OFF SITE DISCHARGE OF SEDIMENT IS NOT ALLOWED.
  - PRIOR TO BEGINNING ROAD CONSTRUCTION AND EARTHWORK ALL CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES (BMP's) AND OTHER MEASURES IN THEIR WORK AS NEEDED TO PREVENT OFF SITE DISCHARGE OF SEDIMENT.
  - EROSION AND SEDIMENT LADEN RUNOFF SHALL NOT BE ALLOWED TO ENTER THE DRAINAGE CHANNELS OR THE PAYETTE RIVER. ROAD CONSTRUCTION AND EARTHWORK SHALL BE STOPPED IF DRAINAGE CHANNELS OR PAYETTE RIVER IS OBSERVED TO HAVE SEDIMENT FROM SITE CONSTRUCTION.

NOTE:  
REVEGETATE DISTURBED AREAS WITH NATIVE GRASSES WHERE BARE GROUND IS EXPOSED DURING CONSTRUCTION BY EITHER EARTHWORK CUT OR EARTHWORK FILL.

NOTE:  
STORMWATER RUNOFF FROM NEW HOME ROOF DRAINAGE SHALL BE RETAINED AND DISPOSED ON EACH SITE IN CONSTRUCTED SWALES OR IN UNDERGROUND INFILTRATION BASINS.

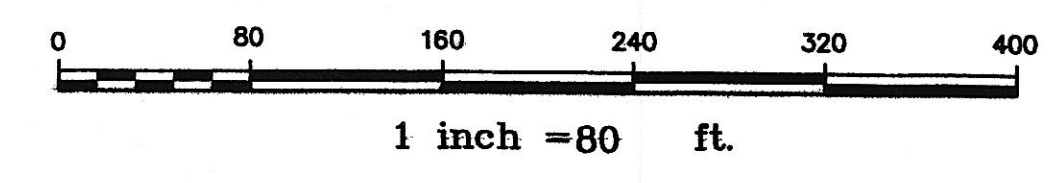

**EROSION AND SEDIMENT CONTROL PLAN**  
 SCALE: 1"=80'

PROJECT NO: 06037  
 DATE: 02-07-07  
 DRAWN BY: CAG

C1.6